


EN 35 RC-30



Data sheet EN-35-010

Orbital Bench Top Riveting Machine

Rivet shank Ø: up to 18 mm | Force: up to 35.00 kN | Stroke: up to 50 mm



DATA SHEET

Key features | Content of delivery

Forming process: Orbital

Standard Version

- Nominal force 35 kN @ 6 bar (max. operating pressure)
- Rivet shaft up to Ø 18 mm (Steel 370 N/mm2)
- Spindle stroke 5 50 mm with 0.01mm micrometer scale and mechanical stroke limit
- Machine weight: approx. 270 kg
- Electro-pneumatic drive power supply @x@V, @Hz
- Permanently lubricated spindle
- head angle 5° for tool length Ls= 84 mm, free height 28 mm or
- head angle 3° for tool length Ls= 116 mm, free height 60 mm (specify when ordering)
- Color: light grey RAL 7035

Including


- FN-RC3-02, RC-30 Time Based Control for 2-hand start button, connections X1, X2, X3, X20. X21
- RC3-X4-01, Connection X4, incl. two-hand relays, for Emergency-Stop and two-hand control
- FN-010, two-hand control
- FN-042, Sensor upper spindle position (TDC)
- FN-034, Pneumatics EN/E without oiler
- Standard accessories and user manual in the language of destination

Options

- FN-RC3-01, RC-30 Time Based Control, connections X1, X2, X3, X20, X21
- RC3-X5-01, Connection X5, incl. PVM Module
- RC3-X6-01, Connection X6, external safety / Reset
- FN-033, Oiler for pneumatics
- FN-015, Emergency stop (push button)
- FN-014, Cycle take over sensor
- FN-201, Adjustable task light, 24 VDC, LED


Subject to change.

Drawing

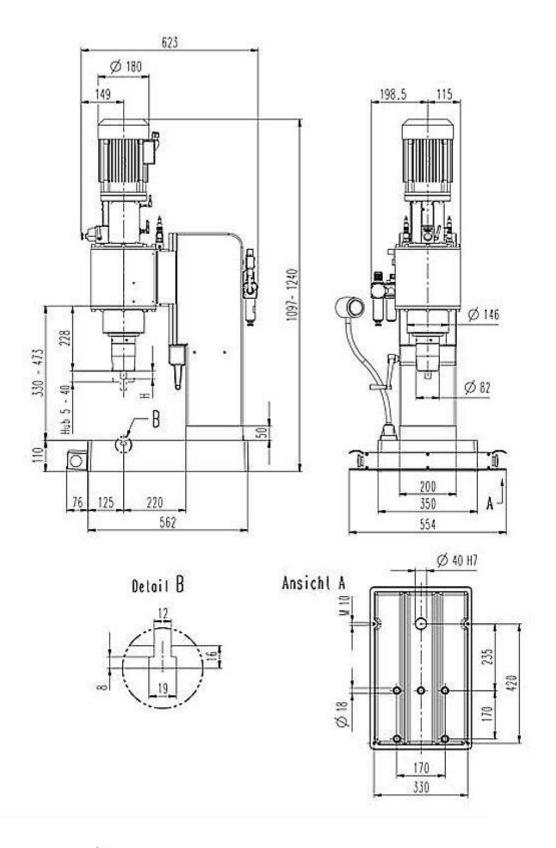

DATA SHEET


Forming tool lengths



Radius mm Rp	Tool length mm Ls	Free height mm H	Shank Ø mm Ds	Angle of inclination α
84.00	28.00		10	5°
116.00	60.00		10	3°



Our engineers are routinely meeting the demands of complex design problems. Having the specific tools needed for your metal forming project can mean the difference between success and failure. Contact us with your unique application for custom tooling.

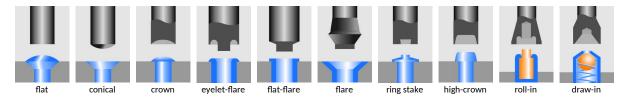

Industries & Applications



