

RNR 331 HPP-25

Data sheet RNR331-HPP

Rotary Indexing Table Riveting Machine Rivet shank Ø: up to 16 mm | Force: up to 33.00 kN | Stroke: up to 50 mm





Key features | Content of delivery

Forming process: Radial

Standard Version

- RNR331 with HPP-25
- Complete work station; column and riser plate
- Electrical rotary indexing table with 6 stations (optional with 4)
- Safety enclosure
- Two hand start button including safety relay or foot pedal
- With pneumatic ejection of the riveted parts on request
- Standard pneumatics
- Work lamp


- Supply voltage 3x230-280V, 50/60Hz or 3x400/480V, 50/60Hz (other supply voltages on request)


- rivet mushroom & pressure shell Rp=@ mm / Ls=@ mm
- Color: Light grey RAL 7035


Subject to change.




Drawing

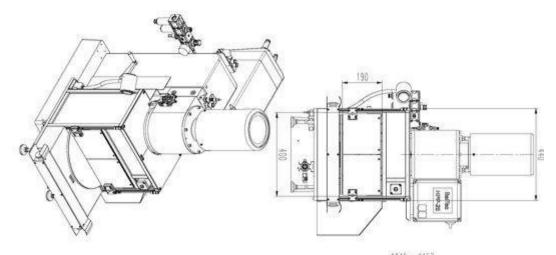

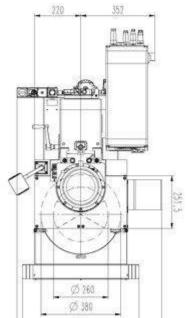


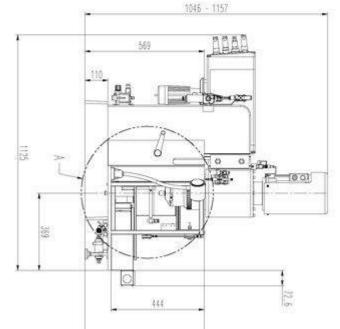

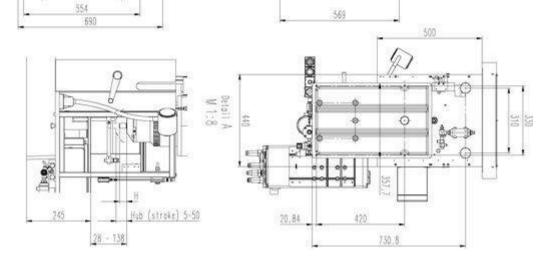



Forming tool lengths




Radius mm Rp	Tool length mm	Free height mm	Shank Ø mm Ds	Angle of inclination α
	Ls	Н		
100.00	68.00	28.00	20	5° 37'
116.00	84.00	44.00	20	4° 47'
132.00	100.00	60.00	20	4° 10'
148.00	116.00	76.00	20	3° 41'
170.00	138.00	98.00	20	3° 10'
191.00	159.00	119.00	20	2° 49'
240.00	208.00	168.00	20	2° 13'



Forming tool profile

Our engineers are routinely meeting the demands of complex design problems. Having the specific tools needed for your metal forming project can mean the difference between success and failure. Contact us with your unique application for custom tooling.

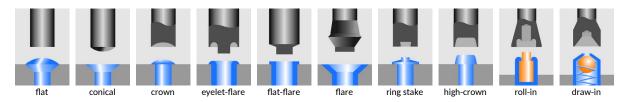

Industries & Applications





BalTec AG Switzerland / Germany

BalTec (UK) Ltd. United Kingdom BalTec France

BalTec France France BalTec Corporation USA / Canada / Mexico BalTec do Brasil Brazil

BalTec Italia Srl Italia Baltee

BalTec Machinery (Shanghai) Ltd. China